

SKIRT SEALING SYSTEM


SPILL BLOCK MODEL : CSB-125

CARESS BELT CONVEYORS
Spill Block with CONCARE Skirt Sealing




Specifications.

Segmented sturdy wear resistant Skirt rubber blocks. Size of the Block 125mm width x 150mm height x 20 mm thk. Dove-Tail design interlocking Skirt Blocks avoids spillage line. Self Locking for clamp plates. More wear equation with height adjustable skirt blocks. Sturdy back plate with guided fastening Arrangement. Single bolted design, Serrated teeth in clamp plates ensure soft but firm contact. Adjustment by hammer tapping without loosening Fasteners. Ease of replacement of worn out skirt blocks.

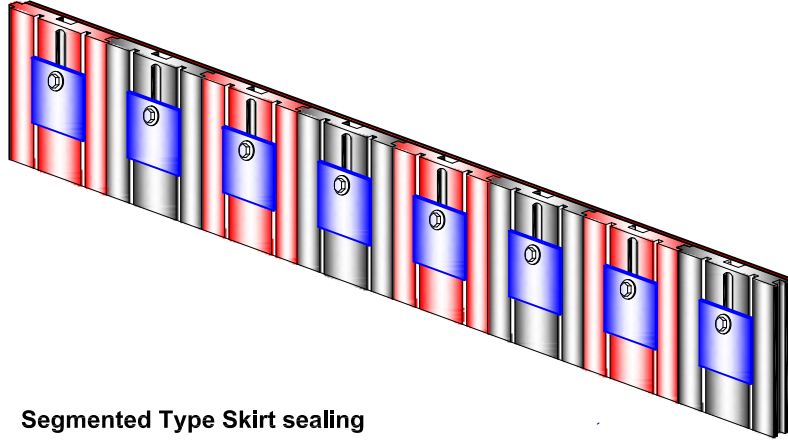


Segmented Type Skirt sealing

CSB-125

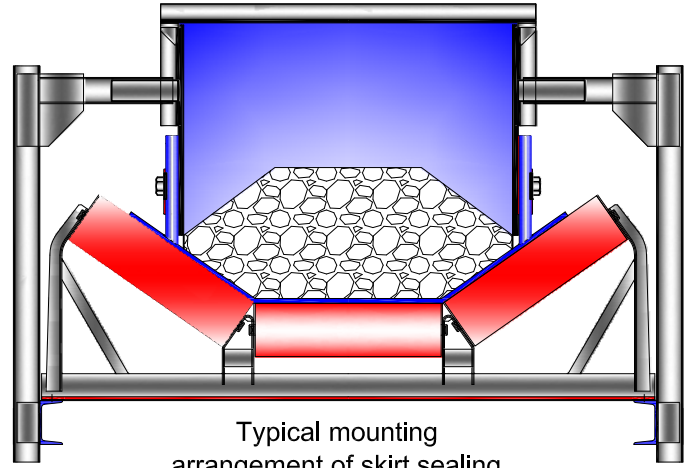

Typical mounting arrangement of skirt sealing




Length of Skirt Sealing system may be no. of 1000mm / 1250mm or multiple of 125mm.

Cost effective Simple to install & Easy to maintain.
Independent with Effective sealing efficiency.
Low space requirement and
Optimum skirt block wear life.
Suitable for all belt widths & speeds
Suitable to Uni & Bi Direction belts only.

Increased conveyor operation efficiency.
Nil material wastages Results in
good environment.
Longer belt life.

Normal Temperature Grade,
Heat Resistance Grade and
Oil Resistance Grade Skirt Blocks are available to suit
application.

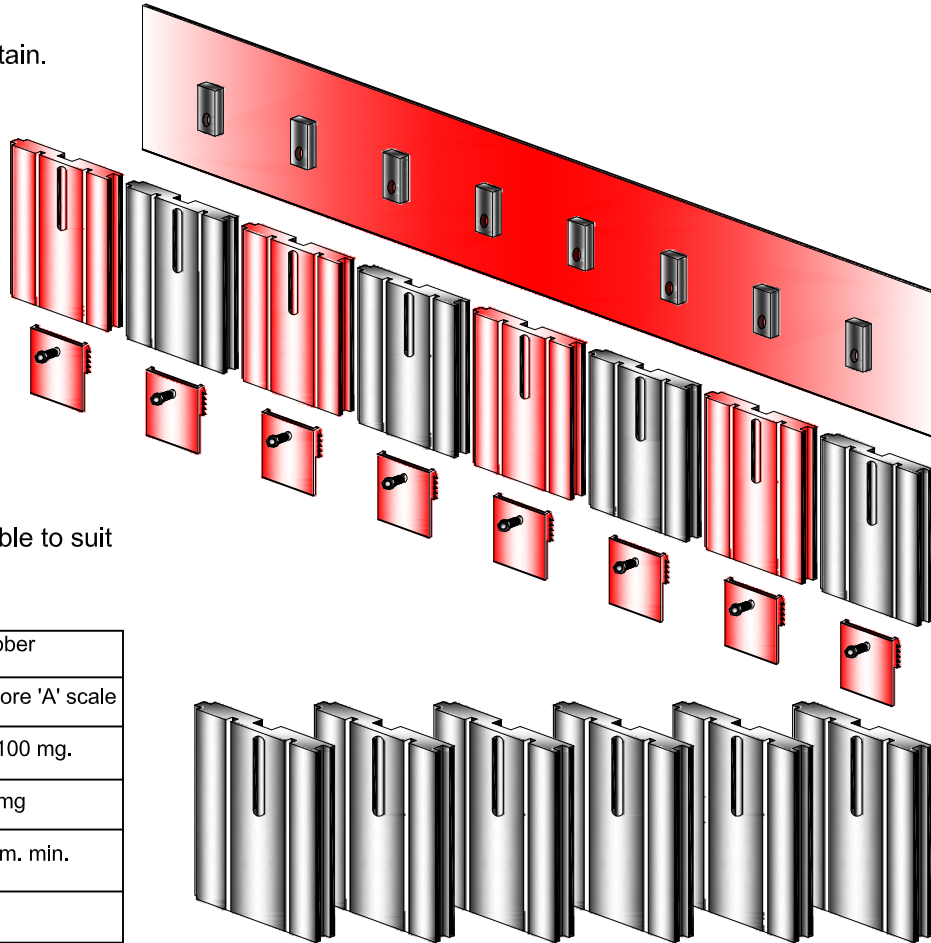

Material	Specification	Natural Rubber
Hardness	IS 3400 PART-2 (1980)	55 to 65 Shore 'A' scale
Abrasion loss	DIN 53516	Maximum 100 mg.
Sp. Gravity	Standard	1.1 to 1.16 mg
Tensile Strength	IS 3400 PART-1 (1977)	180 kg/sq.cm. min.
Elongation at break	IS 3400 PART-1 (1977)	>350 %

Head Office & Works

Caress Belt Conveyors by **BMH CONCARE TECHNOLOGY INC.**

Plot no. 56, Sector-1, Service Industrial Area, Nerul (East), Navi Mumbai - 400 706 India.

Phone :- 022 27702626 / 3258 4616 / 09324297633 / 09324383067

Fax :- 022 27702625. E-Mail :- bmhsales@bmhconcare.com / bmhprojects@bmhconcare.com

**A REVOLUTION IN
ENVIRONMENTAL ENGINEERING**

BMH / CSB-125/012